





HS250M PLUS BLACK

***Monocrystalline silicon high-power panel
with a peak power rating of 250W***

- *0/+5W output tolerance ensure a high productivity*
- *12 years long-term product & 25 years achievement warranty by Germany*



HS250M PLUS BLACK

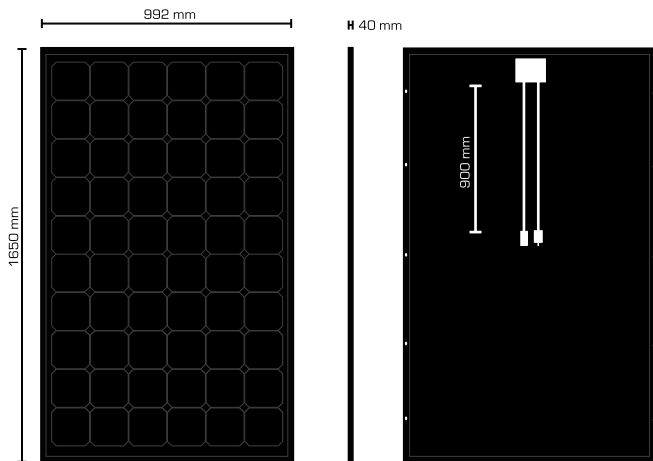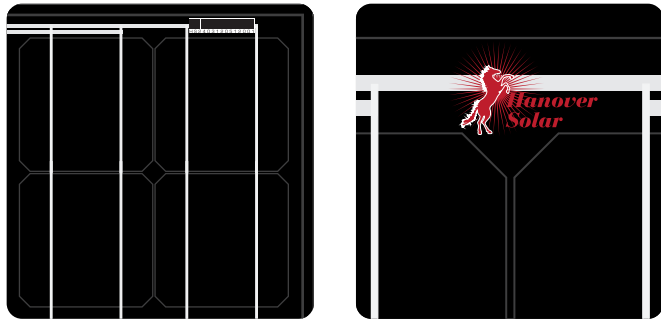


ELECTRICAL DATA

Measured at Standard Test Conditions (STC): irradiance of 1000W/m², AM 1.5, and cell temperature 25° C

Module Type		HS250M
Peak Power (0/+5W)	P _{max}	250 W
Cell Efficiency	η	18.6 %
Panel Efficiency	η	15.3 %
Rated Voltage	V _{mpp}	30.5 V
Rated Current	I _{mpp}	8.19 A
Open Circuit Voltage	V _{oc}	37.9 V
Short Circuit Current	I _{sc}	8.78 A
Maximum System Voltage	TÜV	1000 V DC
Temperature Coefficients	Power (P)	-0.45%/° C
	Voltage (V _{oc})	-0.35%/° C
	Current (I _c)	0.060%/° C
NOCT		45° C +/- 2° C
Series Fuse Rating		15 A

I-V CURVE

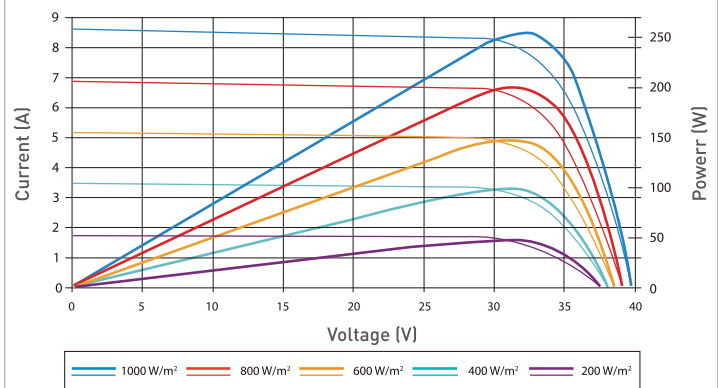

WARRANTY & CERTIFICATE

Warranty period	12 years
Guaranteed power output	12 years: 90 % of nominal power rating
	25 years: 80 % of nominal power rating
Certificates	TÜV: IEC 61215, IEC 61730; CE; CEC

MECHANICAL CHARACTERISTICS

Solar Cell	monocrystalline (156 x 156 mm)
Cells Quantity	60 (6 x 10)
Dimensions	1650 x 992 x 40 mm
Weight	19.5 kg
Glass	3.2 mm tempered glass
Frame	anodized aluminium alloy
Junction Box	TÜV Certified / IP65 / IP67
Output Cables	900 mm / 4.0 mm ²



Hanover Solar GmbH

Walshagenstrasse 127-149 D-48429 Steinfurt Germany

T +49 800-5894091

F +49 800-5894091

E info@hanoversolar.de

www.hanoversolar.de